


.12 MAXIMUM PROTRUSION OF MOUNTING HARDWARE, TYP. ON SIDES AND TOP

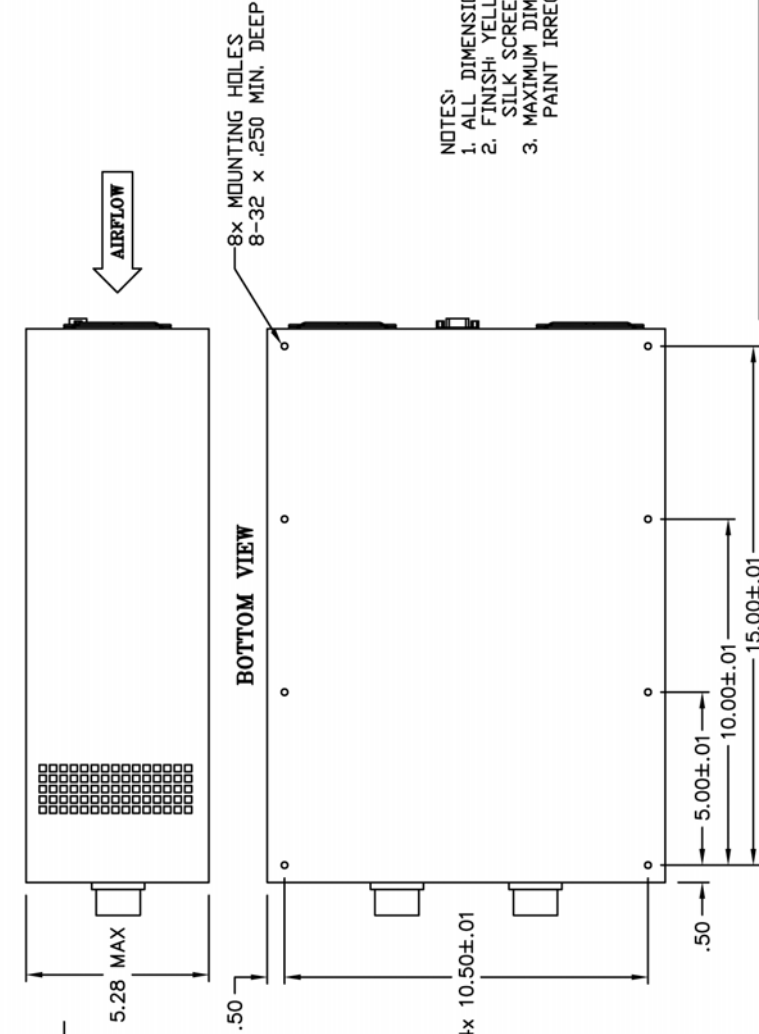

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES.
 2. FINISH- YELLOW IRRIDITE.
 3. MAXIMUM DIMENSIONS EXCLUDE SCREW HEADS AND PAINT IRREGULARITIES.

MONITORING DE-9S	
PIN	DESCRIPTION
1	SPARE
2	OUTPUT GOOD LED+
3	OUTPUT FAIL LED RTN
4	OUTPUT FAIL LED+
5	OUTPUT GOOD LED RTN
6	TP2 JACK BLACK
7	TP1 JACK RED
8-9	SPARE

CONNECTORS PIN DESIGNATION	
J1	J2
PIN DESCRIPTION	PIN DESCRIPTION
A LINE	A LINE
B NEUTRAL	B NEUTRAL
C GROUND	C GROUND
D SPARE	D SPARE

TYP. IN THE OTHER SIDE

THIS DRAWING CONTAINS INFORMATION AND MATERIALS REPRODUCED WITHOUT THE PERMISSION OF POWERTEK			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES	DATE	DATE	DATE
FRACTIONS	DECIMALS	ANGLES	TOLERANCES
-	-	-	-
-	.XXX ± .005	± .50°	-
MATERIAL:	DRWN	RL	09/29/09
FINISH:	CHECKED	BT	09/29/09
	APPROVED	AL	09/29/09

TITLE:		SCALE	SHEET	1 OF 1
OUTLINE DRAWING		1	29019	
GLOBAL 1.3 KVA F/C		SIZE	C	REV. B
9810257				