

Hall Effect DC Current Transducer

CE-IZ04-35C11-1.0

Output: 0-5V; **Power supply:** $\pm 12V$;

Window: 183*70mm; **Case Style:** C11; **Accuracy:** 1.0

Features

High isolation, small size, light in weight, less power consumption, window structure, no insertion loss

Specifications

Operating temperature: $-10\sim 80^{\circ}\text{C}$

Measuring range: $0-\pm 4000\sim \pm 10000\text{A DC}$

Temperature drift: $0.025\% / ^{\circ}\text{C}$


Isolation : 3KVRMS/50Hz/1Min

Current consumption: $\pm 25\text{mA}$


Response time: $15\mu\text{S}$

Overload: 20 times of the maximum value of measuring range


Case Style & Mounting Dimensions

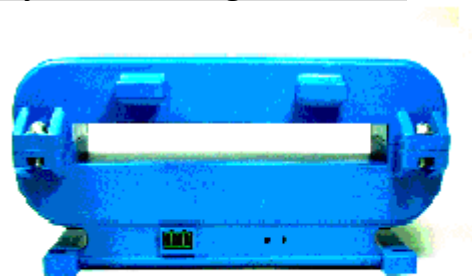

L*W*H: 252*86*166mm

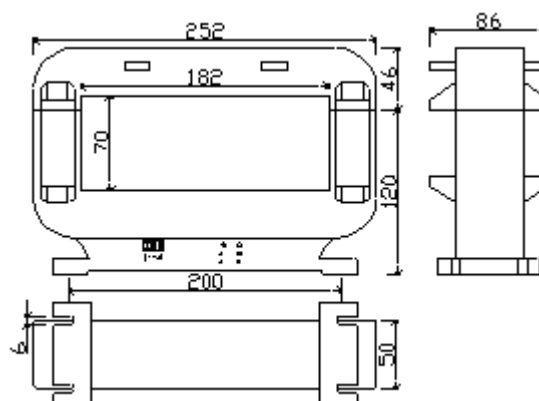

Connections Diagrams

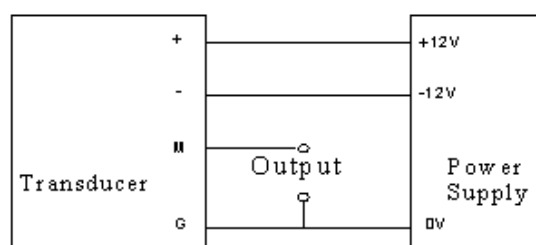

+: Positive power supply

-: Negative power supply

M: Signal output

G: Ground

Notice

- The best accuracy can be achieved when the window is fully filled with bus-bar(current carrying conductor)
- The in-phase output can be obtained when the direction of current of carrying conductor is the same as the direction of arrow marked on the transducer case.